




CHANGZHOU GOOD-JOB
INDUSTRY CO., LTD.

This drawing is the property of and may embody proprietary information owned by **GOOD-JOB**. It is provided under a confidential relationship for a specific purpose. The recipient agrees to use it only for such purpose and to return it to **GOOD-JOB** upon request.
该图所示的专有信息及版权归常州固佳进出口有限公司所有(以下简称GJ)。该图仅供接收方参考使用,并对此图有保密义务。GJ保留对此图无条件回收的权利。

Customer/客户:		Customer Drawing NO./客户图号:	
N/A		N/A	
Customer Rev. Level/客户版本:		Drawing NO./公司图号:	
N/A		GJSS110101/02/03/04	
Customer Description/描述:		Stainless Steel Monobolt	
G.B. Description/描述:		Stainless Steel Our lock Rivet 不锈钢圆头外锁铆钉	
Heat Treatment/热处理:		Body/铆壳 - Annealing Treatment/退火处理 Mandrel/钉芯 - None/无	
Finish/表面处理:		See Notes	
Material/材料:		Drawn/绘制:	<i>Jack Shi</i> Date/日期: 2021.01.04
See Note 1		Check/审核确认:	<i>Mearo Liu</i> Date/日期: 2021.01.04
		Release/发放:	<i>Jack Shi</i> Date/日期: 2021.01.04
Revisions/版本记录			
REV/版本	E.C. NUMBER /工程更改号		Date/日期
A0	New Released		2021.01.04
Scale/比例:		TOL. U.O.S. DECIMALS:± 0.05 ANGLES:±2° 未注尺寸公差: 线性尺寸: ± 0.05 角度: ±2°	
N/A			

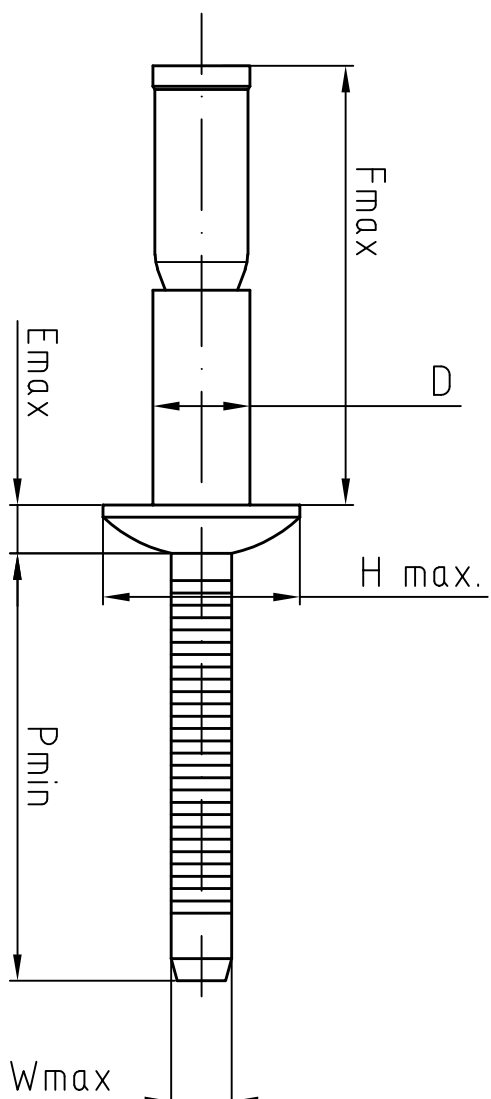

- NOTES:
- 1.Material: Body&Mandrel - 304SUS
材料: 铆壳&钉芯 - 304不锈钢
 - 2.Finish: Body&Mandrel- Natural
表面处理: 铆壳&钉芯 - 无

01	4.8X10	φ4.8±0.09	2.2	18.2	φ9.5±0.29	27	3.05	φ5.0 ~ φ5.2	1.6 ~ 6.5	5100N	6400N
02	4.8X14			24.4					1.6 ~ 11.0		
03	6.4X14	φ6.4±0.11	3.0	26.7	φ13.0±0.35	27	4.11	φ6.7 ~ φ6.9	2.0 ~ 9.5	9000N	11000N
04	6.4X20			36.5					2.0 ~ 16.0		
NO.	Size	D	E	F	H	P	W	HoleSize	Grip Range	Tensile	Shear
序号	规格							钻孔直径	铆接范围	抗拉力	抗剪力