


This drawing is the property of and may embody proprietary information owned by **GOOD-JOB**. It is provided under a confidential relationship for a specific purpose. The recipient agrees to use it only for such purpose and to return it to **GOOD-JOB** upon request.
该图所显示的专有信息及版权归常州固佳进出口有限公司所有(以下简称GJ), 该图仅供接收方参考使用, 并对该图有保密义务。GJ保留对此图无条件回收的权利。

Customer/客户:		N/A		Customer Drawing NO./客户图号:		N/A	
Customer Rev. Level/客户版本:		N/A		Drawing NO./公司图号:		GJAA3310307~10	
Customer Description/描述:				N/A			
GJ Description/描述:				Aluminum Bulbrite Rivet 全铝灯笼铆钉			
Heat Treatment/热处理:				Body/铆壳 - Annealing Treatment/退火处理 Mandrel/钉芯 - None/无			
Finish/表面处理:				See Note 2			
Material/材料:		Drawn/绘制:		Jack Shi		Date/日期: 2021.01.04	
See Note 1		Check/审核确认:		Wearo Liu		Date/日期: 2021.01.04	
		Release/发放:		Jack Shi		Date/日期: 2021.01.04	
Revisions/版本记录							
REV/版本		E.C. NUMBER/工程更改号				Date/日期	
A0		New Released				2021.01.04	
Scale/比例:		TOL. U.O.S. DECIMALS:± 0.05 ANGLES:±2° 未注尺寸公差, 线性尺寸: ± 0.05 角度: ±2°					
N/A							

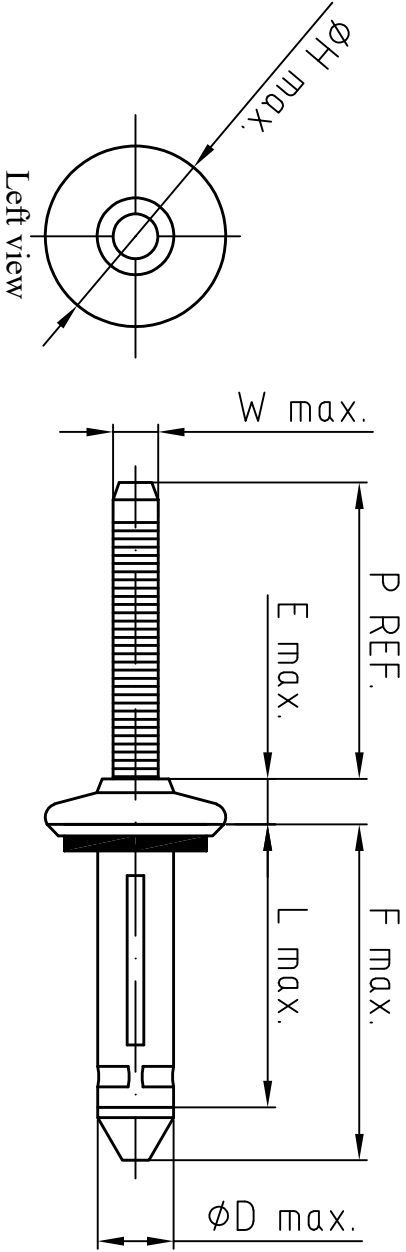

NOTES:

1.Material (材料) : Body-5056 Aluminum / 铆壳-5056铝
Mandrel - 7A03 Aluminum / 钉芯-7A03铝
Washer - EPDM / 垫圈-三元乙丙橡胶

2.Finish: Body&Mandrel- Natural Polished
表面处理: 铆壳&钉芯 - 本色抛光


07	6.4X20.2	$\varnothing 6.39$	4.0	25.5	$\varnothing 14.7$	20.5	25.4	3.9	$\varnothing 6.4$	1.6 ~ 6.4	2500N	4200N
08	6.4X23.4			28.7		23.7				3.2 ~ 9.5		
09	6.4X26.5			31.8		26.8				6.4 ~ 12.7		
10	6.4X29.7			35.0		30.0			$\varnothing 6.9$	9.5 ~ 15.9		
NO.	Size 规格	D	E	F	H	L	P	W	Hole Size 钻孔直径	Grip Range 铆接范围	Tensile 抗拉强度	Shear 抗剪强度



This drawing is the property of and may embody proprietary information owned by **GOOD-JOB**. It is provided under a confidential relationship for a specific purpose. The recipient agrees to use it only for such purpose and to return it to **GOOD-JOB** upon request.

该图所显示的专有信息及版权归常州固佳进出口有限公司所有(以下简称GJ)。该图仅供接收方参考使用,并对此图有保密义务。GJ保留对此图无条件回收的权利。

Customer/客户:		Customer Drawing NO./客户图号:	
N/A		N/A	
Customer Rev. Level/客户版本:		Drawing NO./公司图号:	
N/A		GJAA3330301~04	
Customer Description/描述:		N/A	
GJ Description/描述:		Aluminum Bulbrite Rivet 全铝灯笼铆钉	
Heat Treatment/热处理:		Body/铆壳 - Annealing Treatment/退火处理 Mandrel/钉芯 - None/无	
Finish/表面处理:		See Note 2	
Material/材料:	Drawn/绘制:	Jack Shi	Date/日期: 2021.01.04
	Check/审核确认:	Wenro Liu	Date/日期: 2021.01.04
	Release/发放:	Jack Shi	Date/日期: 2021.01.04
Revisions/版本记录			
REV/版本	E.C. NUMBER /工程更改号		Date/日期
A0	New Released		2021.01.04
Scale/比例:		TOL. U.O.S. DECIMALS:± 0.05 ANGLES:±2° 未注尺寸公差,线性尺寸:± 0.05 角度: ±2°	
N/A			

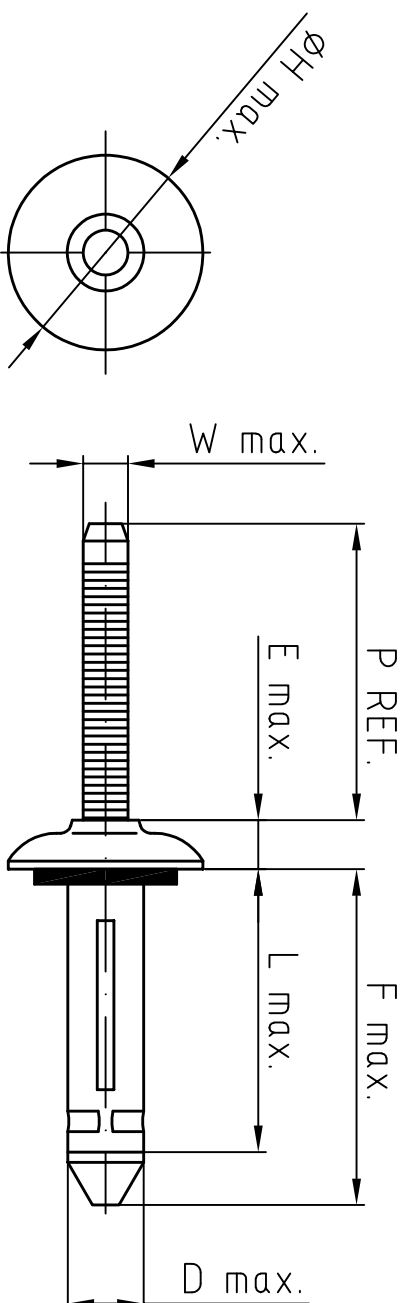

NOTES:

- 1.Material (材料) : Body-5056 Aluminum / 铆壳-5056铝
Mandrel - 7A03 Aluminum / 钉芯-7A03铝
Washer - EPDM / 垫圈-三元乙丙橡胶
- 2.Finish: Body&Mandrel- Natural Polished
表面处理: 铆壳&钉芯 - 本色抛光

01	6.4X20.2			25.5		20.5					φ6.4	1.6 ~ 6.4		
02	6.4X23.4	φ6.39	4.4	28.7	φ15.9	23.7	25.4	3.9	φ6.4	3.2 ~ 9.5	2500N	4200N		
03	6.4X26.5			31.8		26.8								
04	6.4X29.7			35.0		30.0			φ6.9	6.4 ~ 12.7	min.	min.		
										9.5 ~ 15.9				
NO.	Size 规格	D	E	F	H	L	P	W	Hole Size 钻孔直径	Grip Range 铆接范围	Tensile 抗拉强度	Shear 抗剪强度		