




CHANGZHOU GOOD-JOB
INDUSTRY CO., LTD.

This drawing is the property of and may embody proprietary information owned by **GOOD-JOB**. It is provided under a confidential relationship for a specific purpose. The recipient agrees to use it only for such purpose and to return it to **GOOD-JOB** upon request.
该图所示的专有信息及版权归常州固佳进出口有限公司所有(以下简称GJ)。该图仅供接收方参考使用,并对此图有保密义务。GJ保留对此图无条件回收的权利。

Customer/客户:		N/A		Customer Drawing NO./客户图号:		N/A	
Customer Rev. Level/客户版本:		N/A		Drawing NO./公司图号:		GJSS1110401~05	
Customer Description/描述:				N/A			
GJ Description/描述:				Stainless Hemlok Rivet 不锈钢圆头海马铆钉			
Heat Treatment/热处理:				Body/铆壳 - Annealing Treatment/退火处理 Mandrel/钉芯 - None/无			
Finish/表面处理:				See Note 2			
Material/材料:		Drawn/绘制:		Jack Shi		Date/日期: 2021.01.04	
		Check/审核确认:		Mearo Liu		Date/日期: 2021.01.04	
		Release/发放:		Jack Shi		Date/日期: 2021.01.04	
Revisions/版本记录							
REV/版本		E.C. NUMBER /工程更改号			Date/日期		
A0		New Released			2021.01.04		
Scale/比例:		TOL. U.O.S. DECIMALS:± 0.05 ANGLES:±2° 未注尺寸公差, 线性尺寸:± 0.05 角度: ±2°					
N/A							

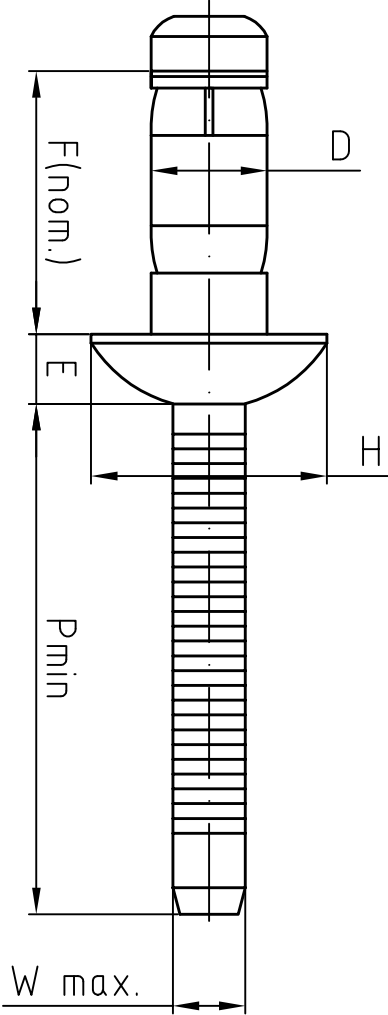

NOTES:

1.Material: Body&Mandrel - 304SUS

材料: 铆壳&钉芯 - 304不锈钢

2.Finish: Body&Mandrel- Natural Polished

表面处理: 铆壳&钉芯 - 本色抛光

01	4.8×9.0	ø4.8 ^{+0.08} _{-0.15}	2.0 ^{+0.5} _{-0.4}	9.0±0.5	ø9.5 ^{+0.7} ₀	28	3.40	ø4.9 ~ ø5.1	1.5 ~ 3.5	4900N min.	6000N min.
02	4.8×11.5			11.5±0.5					3.5 ~ 6.0		
03	4.8×14.0			14.0±0.5					6.0 ~ 8.5		
04	4.8×16.5			16.5±0.5					8.5 ~ 10.5		
05	4.8×19.0			19.0±0.5					11.0 ~ 13.5		6800N min.
No.	Size	D	E	F	H	P	W	Hole Size 钻孔直径	Grip Range 铆接范围	Tensile 抗拉强度	